



Video Conference Camera




The Vivolink VLCAM75 video conference camera provides a high-quality video with Full HD 1080p/30fps for a personal video conference experience. In addition, the wide 80° field-of-view angle and outstanding image quality in low-light, provides an excellent visual collaboration experience. Thanks to its built-in two Omni-directional microphones, it can capture crystal-clear voice up to a distance of 3.6 meters. The USB plug-and-play connectivity and tripod-ready universal clips make it effortless to enrich online meeting experience.

Key Features

- Full HD 1080p premium video quality
- Wide 80° field of view angle can capture people with ease
- Dual microphones capture voice from every angle
- Quick and easy USB connecting
- Compatible with Zoom, Skype, Microsoft Teams, Google Meet, etc.



Applications

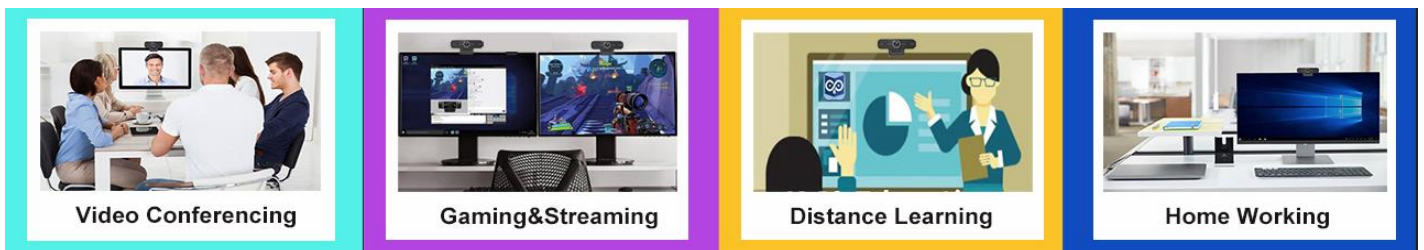

Personal Video Conference



- One-on-one conference call
- Premium quality camera with a clip for laptops or monitors
- Work from home video communication
- Optimized microphone distance 3.6 meters

Huddle Space Video Conference



- Stand-up video conference; no table and chairs required
- Pop-in meeting set-up
- Short and brief communication
- Mic array optimized distance 3.6 meters

Product Specifications

Sensor	High Quality HD 2.07MP CMOS sensor
Video Format	1920x1080 30/25 fps 1280x720 30/25 fps 640x480 30/25 fps 640x360 30/25 fps
Video Output (HD) Interface	USB 2.0
Horizontal Viewing Angle	80°
Lens Focal length	3.24mm
Focal Length	Fixed Lens
Video S/N Ratio	> 50dB
Minimum Illumination	0.5 lux
Focus System	Fixed Lens
Gain Control	Auto
White Balance	Auto, Manual
Brightness Control	Yes
Exposure Control	Auto
2D NR	Yes
Camera Control Interface	USB
Camera Control Protocol	UVC / UAC
Built-in Mic	2 Omni-directional Mic
Power Consumption	2.5W (5V @0.5A)
Video Format	YUY2 / MJPEG / H.264
Mic Effective Distance	3.6 meters
Weight	0.15kg
Dimensions	102*46*30 mm

Accessories

Wall/Ceiling mount



VLMCAM2



VLCAMSCREW

USB2.0 Cable extension



5 m	PROUSBAAF5
10 m	PROUSBAAF10
15 m	PROUSBAAF15
20 m	PROUSBAAF20