


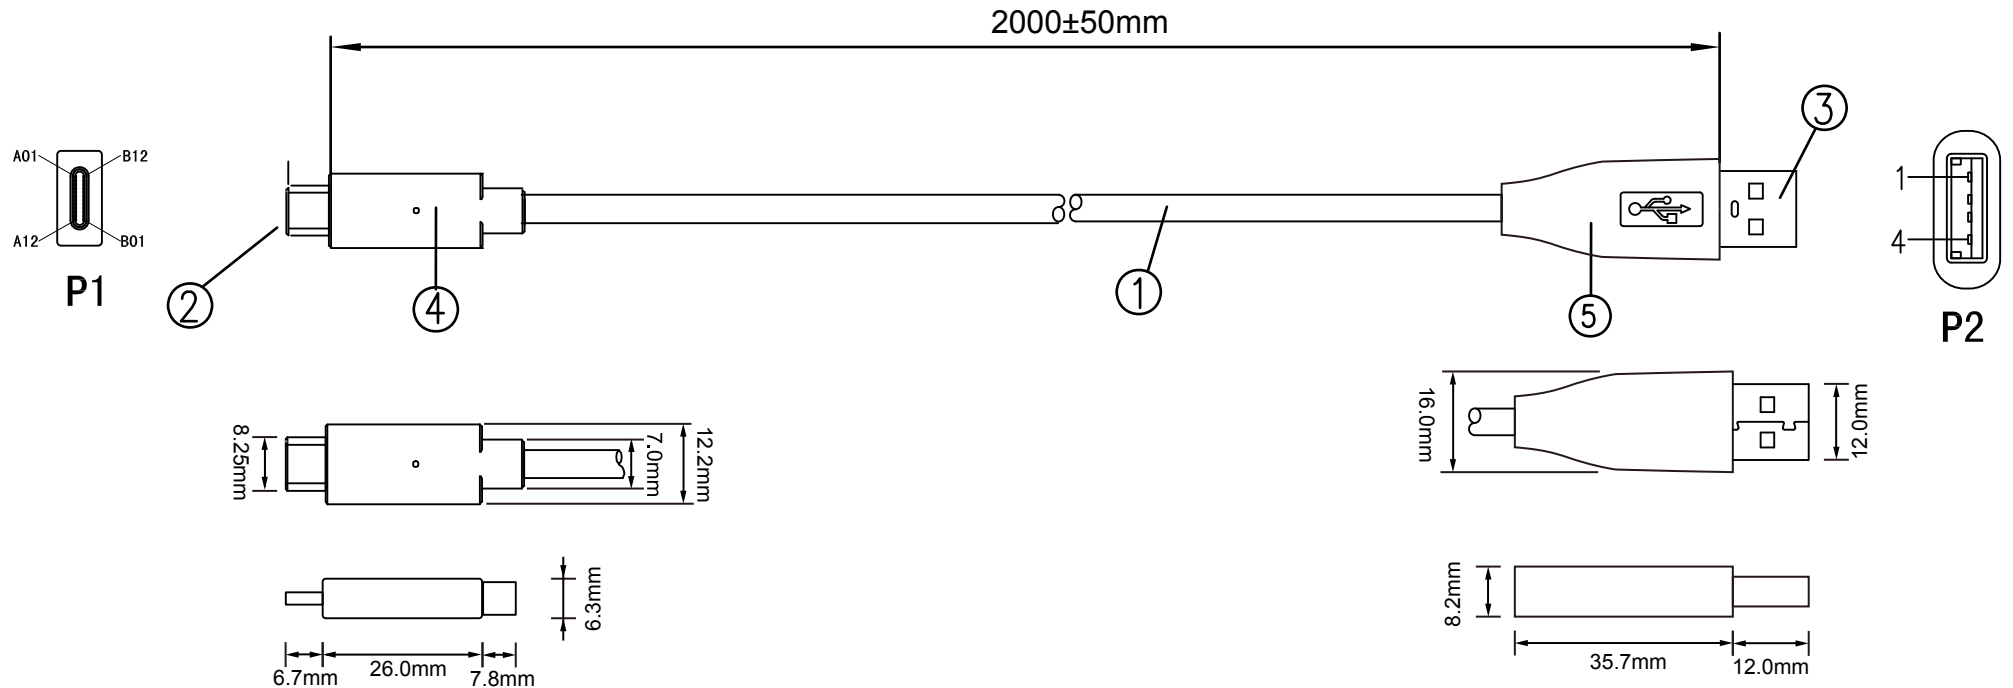


PIN ASSIGNMENT:

USB C TYPE(P1)

A1,B1,A12,B12	4 GND
A4,B4,A9,B9	1 V+
A6	3 D+
A7	2 D-
Shell	Shell Shild
A5	Resistor 56k

USB2.0 AM(P2)

4 GND
1 V+
3 D+
2 D-
Shell Shild

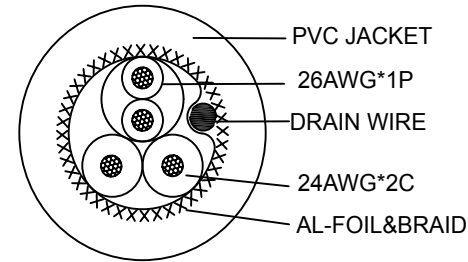

⑤	HOOD MOLD	1PCS	BLACK PVC (35.7*16*8.2mm)
④	HOOD MOLD	1PCS	BLACK PVC (26*12.2*6.3mm)
③	USB2.0 A M	1PCS	NICKEL PLATED SHELL
②	USB3.1 TYPE C M	1PCS	NICKEL PLATED SHELL
①	CABLE	1PCS	(26AWG*1P)+24AWG*2C+AEB OD:5.0±0.2mm BLACK PVC JACKET
NO.	PARTS NAME	Q'TY	SPECIFICATION

NOTES:

1. TESTING: 100% OPEN AND SHORT TEST.
2. ALL MATERIAL BE RoHS COMPLIANT.

APPROVED	CHECKED	DRAWN	CUSTOMER:	
			ITEM NO.	USBC-1006M
			REV.	01
			UNIT	mm
			SCALE	NONE

DESCRIPTION:

USB 3.1 TYPE C MALE/
USB 2.0 A MALE

